

# Specification


## FOR

### Armored Optic Cable [GYTS] Multimode

---

## 1. CABLE CONSTRUCTION

### 1.1. CROSS SECTIONAL DIAGRAM

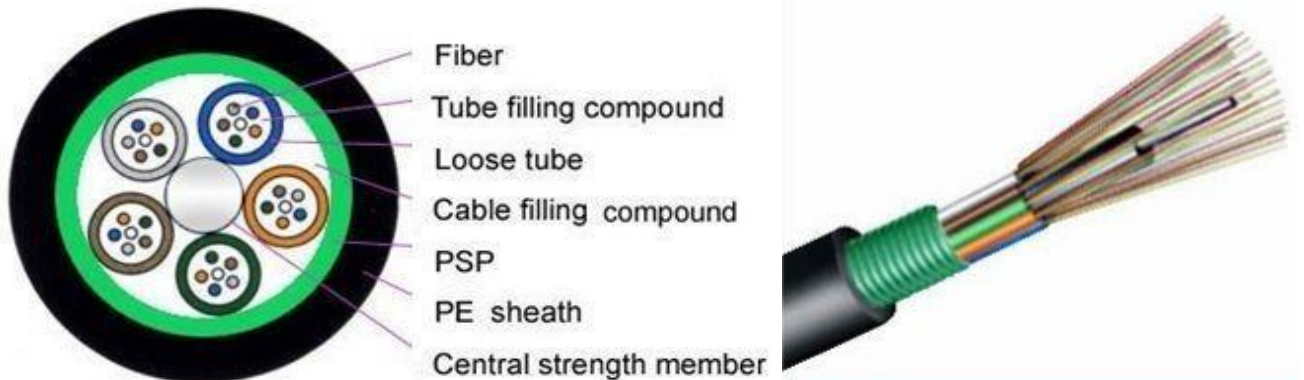

### 1.2. TECHNICAL SPECIFICATION

<b>Fiber count</b>		2~30	32~36	38~60	62~72	74~84
Loose Tube	OD (mm):	1.6 ± 0.1	1.6 ± 0.1	1.9 ± 0.1	1.9 ± 0.1	1.9 ± 0.1
	Material:	PBT				
Max fiber count/tube		6	6	12	12	12
Core unit		5	6	5	6	7
Steel/Coating (mm)		1.4	1.7	1.4	2.0	2.0/2.6
Water Block Material:		Water blocking Compound				
Armored		Corrugated Steel type				
Sheath	Thickness:	Non. 1.5mm				
	Material:	PE				
OD of cable (mm)		8.8	9.1	9.5	10.0	10.6
Net weight (kg/km)		83	91	91	110	121
<b>Fiber count</b>		86~96	98~108	110~120	122~132	134~144
Loose Tube	OD (mm):	1.9 ± 0.1	1.9 ± 0.1	1.9 ± 0.1	1.9 ± 0.1	1.9 ± 0.1
	Material:	PBT				
Max fiber count/tube		12	12	12	12	12
Core unit		8	9	10	11	12
Steel/Coating (mm)		2.0/3.2	2.0/3.8	2.0/4.5	2.0/5.1	2.0/5.7
Water Block Material:		Water blocking Compound				
Armored		Corrugated Steel type				
Sheath	Thickness:	Non. 1.5mm				
	Material:	PE				
OD of cable (mm)		11.2	11.8	12.5	13.1	13.7
Net weight (kg/km)		132	144	157	169	182

## 2. FIBER AND LOOSE BUFFER TUBE IDENTIFICATION

NO.	1	2	3	4	5	6	7	8	9	10	11	12
Tube Color	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Pink	Aqua
NO.	1	2	3	4	5	6	7	8	9	10	11	12
Fiber Color	Blue	Orange	Green	Brown	Slate	natural	Red	Black	Yellow	Violet	Pink	Aqua

## 3. OPTICAL FIBER

### 3.1 Multi Mode Fiber

LTEMS	UNITS	SPECIFICATION					
		62.5/125	50/125	OM3-150	OM3-300	OM4-550	
Fiber Core Diameter	μm	62.5±2.5	50.0±2.5	50.0±2.5			
Fiber Core Non-circularity	%	≤6.0	≤6.0	≤6.0			
Cladding Diameter	μm	125.0±1.0	125.0±1.0	125.0±1.0			
Cladding Non-circularity	%	≤2.0	≤2.0	≤2.0			
Coating Diameter	μm	245±10	245±10	245±10			
C0at-Clad Concentricity	μm	≤12.0	≤12.0	≤12.0			
Coating Non-circularity	%	≤8.0	≤8.0	≤8.0			
Core-Clad Concentricity	μm	≤1.5	≤1.5	≤1.5			
Attenuation	850nm	dB/km	3.0	3.0	3.0		
	1300nm	dB/km	1.5	1.5	1.5		
OFL	850nm	MHz · km	≥160	≥200	≥700	≥1500	≥3500
	1300nm	MHz · km	≥300	≥400	≥500	≥500	≥500
The biggest theory numerical aperture	/	0.275 ± 0.015	0.200 ± 0.015	0.200 ± 0.015			

#### 4. Mechanical and Environmental Performance of the Cable

NO.	ITEMS	TEST METHOD	ACCEPTANCE CRITERIA
1	Tensile Loading Test	#Test method: IEC 60794-1-E1 -. Long-tensile load: 600N -. Short-tensile load: 1500N -. Cable length: ≥50m	-. Attenuation increment@1550nm: ≤0.1dB -. No jacket cracking and fiber breakage
2	Crush Resistance Test	#Test method: IEC 60794-1-E3 -. Long load: 300 N/100mm -. Short load: 1000 N/100mm Load time: 1 minute	-. Attenuation increment@1550nm: ≤0.1dB -. No jacket cracking and fiber breakage
3	Impact Resistance Test	#Test method: IEC 60794-1-E4 -. Impact height: 1 m -. Impact weigh: 450 g -. Impact point: ≥5 -. Impact frequency: ≥3/point	-. Attenuation increment@1550nm: ≤0.1dB -. No jacket cracking and fiber breakage
4	Repeated Bending	#Test method: IEC 60794-1-E6 -. Mandrel diameter: 20D (D = cable diameter) -. Subject weight: 15kg -. Bending frequency: 30 times -. Bending speed: 2s/time	-. Attenuation increment@1550nm: ≤0.1dB -. No jacket cracking and fiber breakage
5	Torsion Test	#Test method: IEC 60794-1-E7 -. Length: 1m -. Subject weight: 25kg -. Angle: ±180 degree -. Frequency: ≥10/point	-. Attenuation increment@1550nm: ≤0.1dB -. No jacket cracking and fiber breakage
6	Water Penetration Test	#Test method: IEC 60794-1-F5B -. Height of pressure head: 1m -. Length of specimen: 3m -. Test time: 24 hours	-. No leakage through the open cable end
7	Temperature Cycling Test	#Test method: IEC 60794-1-F1 -. Temperature steps: +20°C、-40°C、+70°C、+20°C -. Testing Time: 24 hours/step -. Cycle index: 2	-. Attenuation increment@1550nm: ≤0.1dB -. No jacket cracking and fiber breakage
8	Drop Performance	#Test method: IEC 60794-1-E14 -. Testing length: 30cm -. Temperature range: 70±2°C -. Testing Time: 24 hours	-. No filling compound drop out
9	Temperature	Operating: -40°C~+60°C Store/Transport: -50°C~+70°C Installation -20°C~+60°C	

## 5. FIBER OPTIC CABLE BENDING RADIUS


Static bending:  $\geq 10$  times than cable out diameter

Dynamic bending:  $\geq 20$ times than cable out diameter.

## 6. PACKAGE AND MARK

### 6.1 PACKAGE

Not allowed two length units of cable in one drum, two ends should be sealed. Two ends should be packed inside drum, reserve length of cable not less than 3 meters.

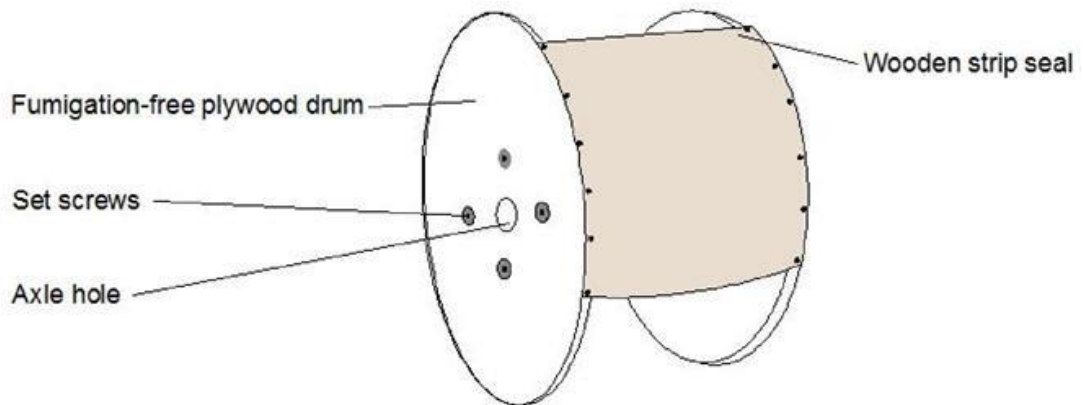

### 6.2 MARK

Cable Mark: Brand, Cable type, Fiber type and counts, Year of manufacture, Length marking .

## 7. TEST REPORT

Test report and certification supplied.