

Hybrid Adapter



Features:

Discordia, ANSI, TIA/EIA, NTT and JIS compliance

High precision alignment.

Good repeatability.

Good changeability.

Good temperature stabilization.

Application:

CATV System

Telecommunication


ns Optical

Networks

Testing/Measurement Instruments Fiber To the Home


Parameter:

Description: Hybrid Adapter			
Item NO.	Test Item	Unit	Standard & Requirement
1	Insertion Loss (dB)	dB	≤ 0.50 dB
2	Repeatability (dB)	dB	≤ 0.10 dB
3	Interchangeability (dB)	dB	≤ 0.20 dB
4	Plug times	times	> 500
5	Tensile strength	G	200~600G
6	Operating temperature	Celsius	-40---+85 Celsius
7	Storage temperature	Celsius	-40---+110 Celsius
8	Humidity	Celsius	95%RH (Non-Packaging)

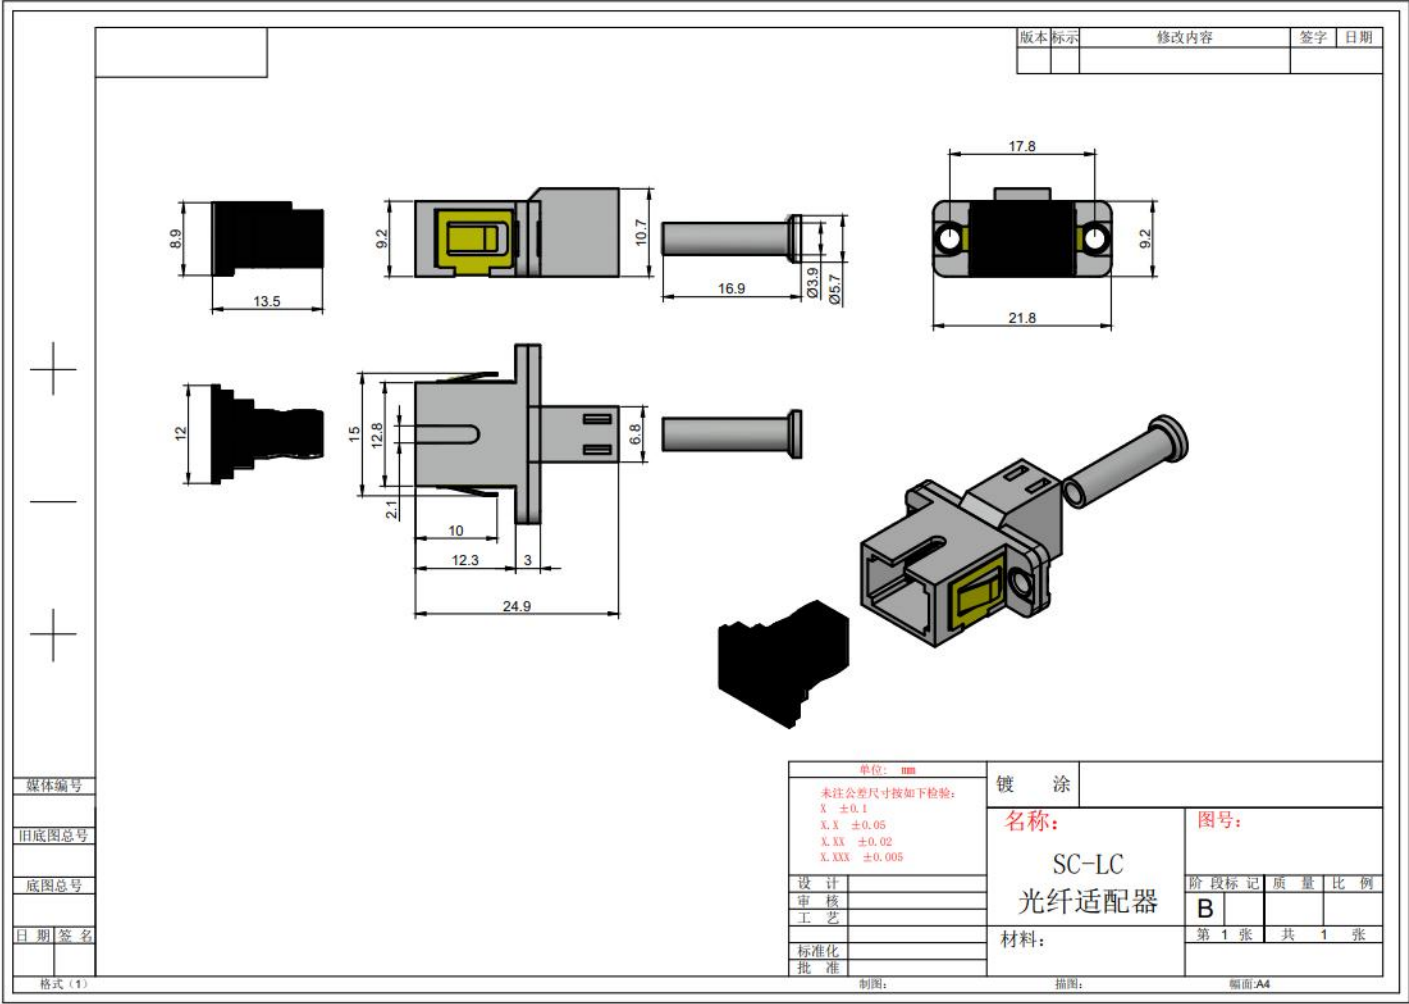

单位: mm		镀 涂				
未注公差尺寸按如下检验: X ±0.1 X.X ±0.05 X.XX ±0.02 X.XXX ±0.005		名称: SC-LC 光纤适配器		图号:		
设计	阶段标记			质量	比例	
审核	B					
工艺	第 1 张			共	1 张	
标准化	材料:					
批准						

制图: 描图: 幅面A4

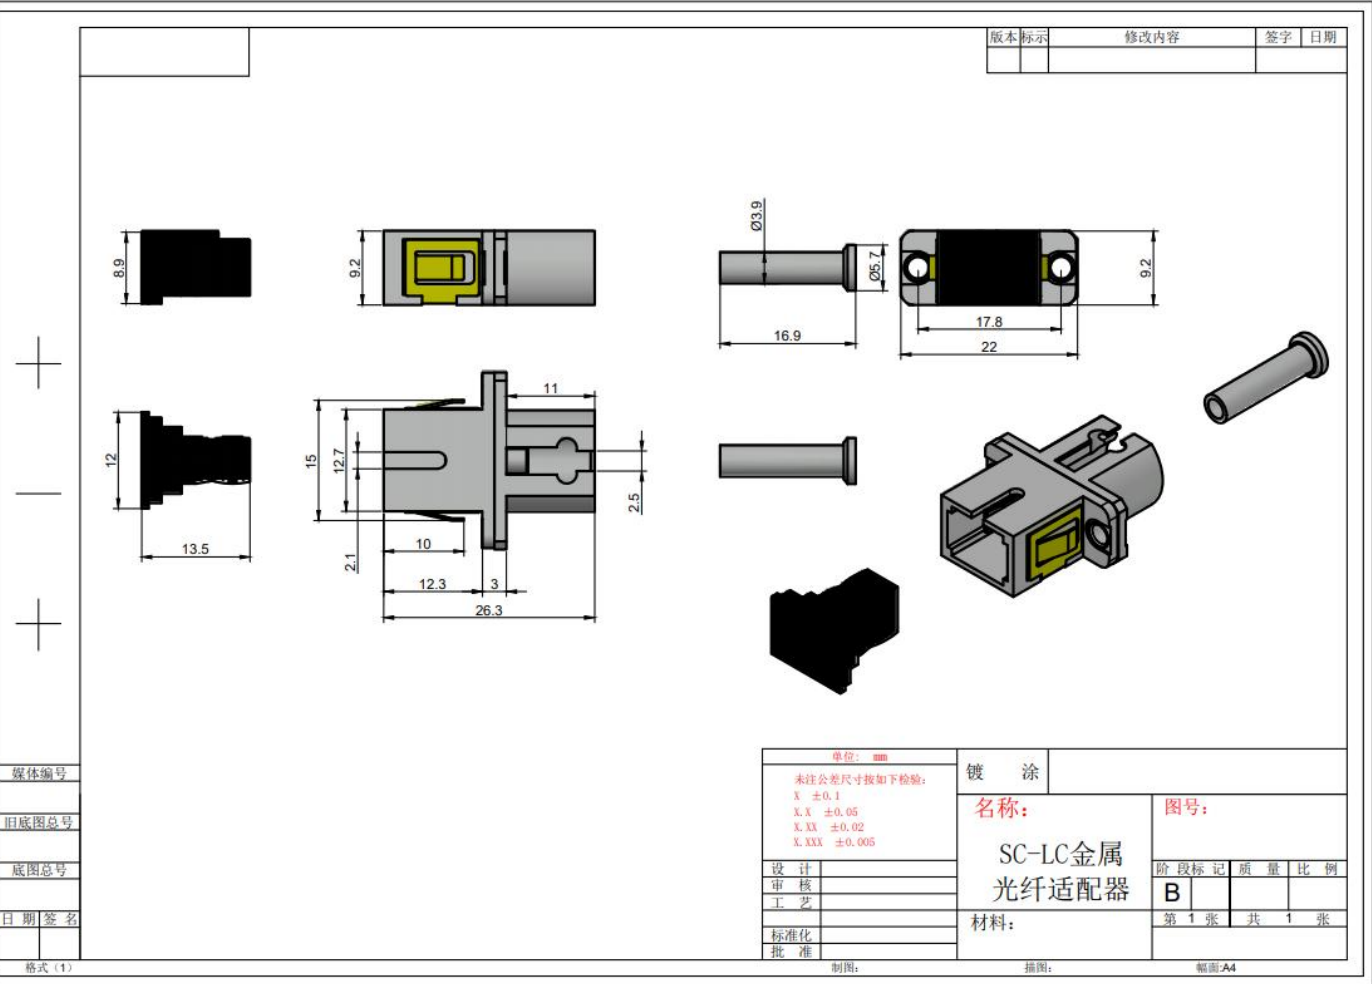

单位: mm		镀 涂			
未注公差尺寸按如下检验:		名称: SC-LC金属 光纤适配器		图号:	
X ±0.1				阶段标记 质 量 比 例	
X.X ±0.05				B	
X.XX ±0.02				第 1 张 共 1 张	
X.XXX ±0.005		材料:			
设 计					
审 核					
工 艺					
标准化					
批 准					

制图: 描图: 幅面A4