



**TECHNICAL DATA SHEET
FOR 10GBPS 850NM SFP+**

(SFP-10G-MD8-0.3)

Hangzhou RunZhou Fiber Technologies Co., Ltd
All rights reserved

1. Product Features

- Up to 10Gbps data links
- 300m with 50/125μm 2000MHz MMF
- 850nm VCSEL laser
- Digital Diagnostic Monitor DDM
- Hot-pluggable SFP+ footprint
- Single 3.3V power supply
- Operating temperature: Refer to *1
- RoHS
- Applications



√ 10GBase-SR/SW 10G Ethernet

Part Number	Wave Length Tx/Rx	Distance	Laser	Temperature
SFP-10G-MD8-0.3	850NM	300m	VCSEL	0~70°C

2. Product Description

The SFP-10G-MD8-0.3 is a 10Gbps enhanced small form factor pluggable SFP+ transceiver compatible with 10GBASE-SR/SW. It is suitable for multi-mode fiber (MMF) communications in 10Gbps Ethernet.

3. Regulatory Compliance

OPT transceivers are Class 1 Laser Products comply with FDA regulations. Meet Class 1 eye safety requirements of EN 60825 and the electrical safety requirements of EN 60950.

4. Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	VCC	-0.5	3.6	V
Operating Case Temperature	TC	0	70	°C

5. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	TC	0		70	°C
Power Supply Voltage	VCC	3.15	3.3	3.45	V
Power Supply Current	ICC			200	mA
Data Rate			10		GBps
Max Link Length on 50/125μm 2000MHz MMF	Lmax			300	m

6. Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Centre Wavelength	λ_c	840	850	860	nm
Spectral Width (RMS)	σ			0.5	nm
Average Output Power	Pout	-5		0	dBm
Extinction Ratio	ER	3.5			dB
Average Launch Power of Off Transmitter	Poff			-30	dBm
Receiver					
Centre Wavelength	λ_c	840	850	860	nm
Receiver Sensitivity	PIN			-13	dBm
Receiver Overload	PMAX	0.5			dBm
LOS De-Assert	LOSD			-16	dBm
LOS Assert	LOSA	-18			dBm
LOS Hysteresis		0.5			dB

7. Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Input Differential Impedance	Zin	90	100	110	Ω
Data Input Swing Differential	Vin	200		700	mV
Tx-Dis Disable	Vd	2.0		Vcc	V
Tx-Dis Enable	Ven	0		0.8	V
Receiver					
Data Output Swing Differential	Vout	300		800	mV
Rx-Los Fault	Vlf	2.0		VccHOST	V
Rx-Los Normal	Vln	0		0+0.8	V
Output rise and fall time	Tr, Tf	28			ps

8. Pin Descriptions

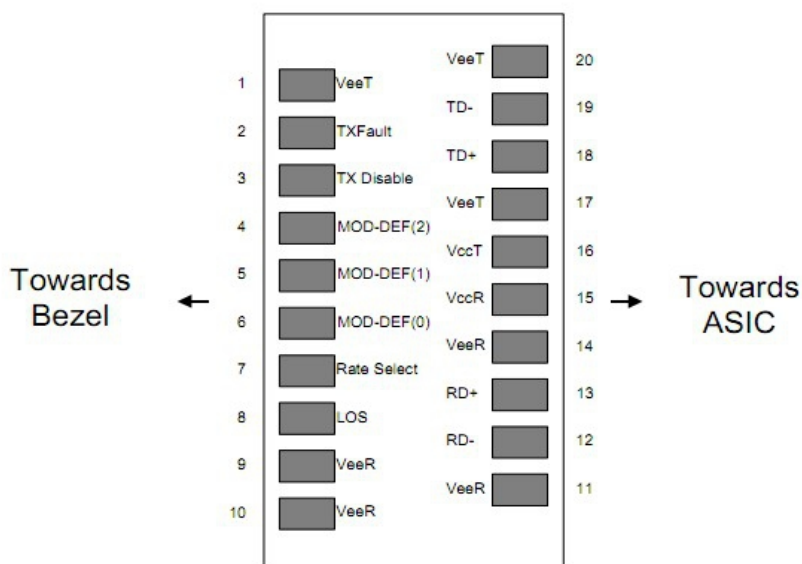


Diagram of Host Board Connector Block Pin Numbers and Names

Pin	Symbol	Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
2	TFAULT	Transmitter Fault.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	7.2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	7.3
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	7.3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	7.3
7	RS0	Rate Select0, optionally controls SFP+ module receiver. When high input signaling rate>4.25 GBd and when low input signaling rate<4.25GBd	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	7.4
9	RS1	Rate Select1, optionally controls SFP+ module receiver. When high input signaling rate>4.25 GBd and when low input signaling rate<4.25GBd	
10	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
11	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
12	RD-	Receiver Inverted DATA out. AC Coupled.	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	7.1

Notes:

- Circuit ground is internally isolated from chassis ground.
 - Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
 - Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V.
- MOD_DEF(0) pulls line low to indicate module is plugged in.
- LOS is open collector output. Should be pulled up with 4.7k -10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.


9. Eeprom & Ddm Threshold

2 wire address 1010000X (A0hex)


0~95 Serial ID Defined by SFP MSA (96 bytes)
96~127 Vendor Speific (32 bytes)
128~255 Reserved (128 bytes)

	Low Alarm	Low Warn	High Warn	High Alarm
Temp	-5°C	0°C	70°C	75°C
Voltage	3V	3V	3.6V	3.7V
Tx Bias	4mA	5mA	10.8mA	11.8mA
Tx Power	-6dBm	-5dBm	-1dBm	0dBm
Rx Power	-16dBm	-14dBm	-1dBm	0dBm

10. Recommend Circuit

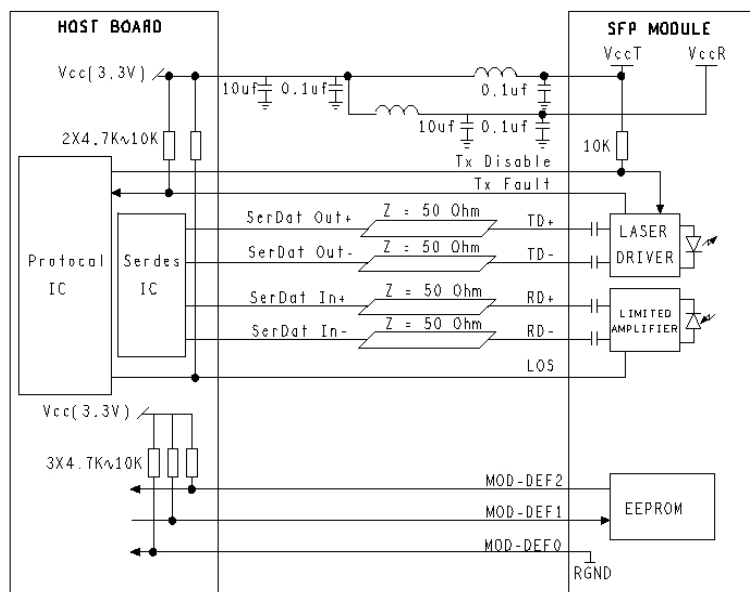

11. Mechanical Specifications

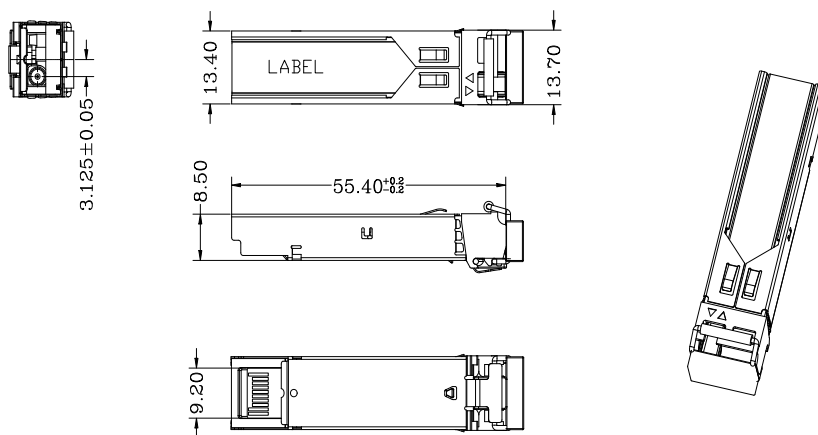

Units in mm
Tolerance without indication is $\pm 0.1\text{mm}$

12. Ordering Information

Part No.	Data Rate	DDM	Wave	Fiber Type	Dist.	Temp.	Optical Interface
SFP-10G-MD8-0.3	10Gbps	yes	850nm	MMF	300m	0~70°C	LC