



AI-5 Pro OPTICAL FIBER FUSION SPLICER

Suitable for security monitoring projects

SIGNAL FIRE INTELLIGENT MANUFACTURING



Signal Fire AI-5Pro is mainly suitable for security monitoring and other engineering projects. six motors、core alignment,Adopting a 5-inch color screen, the operation graphics are simple and intuitive; Up to 320x focusing magnification, 8 seconds high-speed splicing, 18 seconds heating, with a 50% increase in work efficiency compared to ordinary fusion machines; The 5200mAh lithium battery can fuse and heat about 160 cells when fully charged. Its unique lighting design makes it convenient for night construction or emergency repairs.

SUPER COST-EFFECTIVE



METAL BODY BEAUTIFUL DETAILS



Tanguages available

Multilingual Settings, covering the global market













Chinese

English

French

Russian













Ukrainian

Portuguese

Polish


Spanish

Thai

Arabic

5200mAh lithium battery



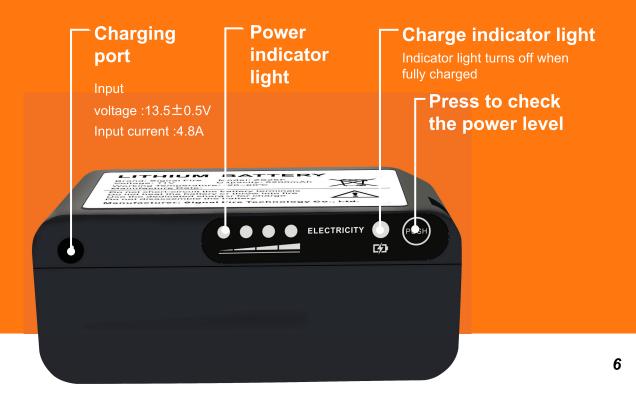

3 in 1 fiber holder

SM, MM, bare fiber, pigtail, Drop cable, multi fiber cable



Jumper fiber (pigtail)



Drop cable



Bare fiber

Dust prevention fall prevention shock prevention



Thickened buffer structure

Don't be afraid to knock! Touch! Fall!

Lighting for splicer

Convenient for night operation



Basic parameter

Fiber alignment	Core/cladding
Motor number	Six motors (accurate of fiber alignment: 0.5µm)
Splicing time	8s
Heating mode	18s, can be customized according to the external environment
Fiber type	Single-mode fiber (SMF/G.652), multimode fiber (MMF/G.651), dispersion-shifted fiber(DSF/G.653), non-zero dispersion-shifted fiber (NZ-DSF/G.655), and bend-insensitive fiber (BIF/G.657); suitable for splicing bare fiber, pigtail, drop fiber, patch cord, and invisible fiber.
The cladding diameter	80-150 μm
Splicing loss	0.02dB (SM) 、0.01dB (MM) 0.04dB (DS/NZDS)
Splicing mode	Automatic focusing core alignment, conventional/high precision welding
Splicing way	Automatic, semi-automatic
Fiber holder	Three in one fixture, no need to change, suitable for single/multi-mode, multi-core cable/bare fiber, tail fiber, jumper fiber,drop cable
Battery capacity	5200mAh large capacity lithium battery charging time ≤3.0 hours; It can continuously weld and heat about 160 cores
Magnification	320x (X or Y axis single display), 160x (x and Y axis dual display)
Fiber diameter	Coating diameter: 80-150µm/Coating diameter: 100-1000µm
Cutting length	Coating layer 250µm below: 8-16mm/coating layer 250-1000µm: 16mm
Heat shrink tube	60mm、50mm、40mm、25mm
Tensile testing	standard 2N
display	5 inch TFT color display screen
Boot time	1s, boot can enter the working mode
Data is stored	Unlimited, machine storage 1000 groups, the excess part can be stored in the server, can export data.
Wireless communication	Based on bluetooth 4.2 protocol standard, the working band is 2.4GHz, the maximum transmission range is 60m
Software upgrade	Mobile phone APP Internet update, enable Bluetooth synchronization upgrade machine software
Management function	The equipment owner can be bound as the highest authority, and can remotely view the welding records, welding time, loss, etc. through the mobile phone APP. The number of welding times or working time of the equipment can be set. The manager can effectively manage a single or multiple equipment.
interface	USB2.0 (Type A) can be used to connect external LED lights and charge mobile devices
Return loss	Better than 60 db
Product protection	Waterproof, dustproof and fall proof
Power supply	Input AC100-240V 50/60Hz, output DC13.5V/4.8A, the current power mode can be identified, real-time monitoring of the current battery level
The work environment	Temperature: -15 ~ +50°C, humidity: < 95%RH (no condensation), working altitude: 0 ~ 5000m, maximum wind speed: ≤15m/s

STANDARD CONFIGURATION









- **1** Fusion Splicer **2** Toolkit **3** S07 Fiber Cleaver
- **4** Alcohol Bottle **5** Wire stripping pliers **6** Miller stripper

- 7Belt 8Toolbox strap 9Power Adapter 0User's manual /

Quality Certificate / Fiber for ARC calibration / Warranty Card

Size and weight



Machine weight

- 1.91kg (with battery)
- 1.55kg (without battery)



Toolkit weight

3.50kg

(including machine and accessories)



Total weight
4. 20kg

SERVICE COMMITMENT

Three years warranty, but these circumstances are not within the scope of this provision.

01.Except for the cleaver, miller clamp, stripping pliers, fiber holders and other tools whose life depends on the frequency of use and the use of the environment. Also electrodes are consumption material which are not in the warranty.

02.Battery and power adapter are warranty for one year, it is in free warranty where it is damaged or can not be charged in one year.



Signal Fire Technology Co., Ltd. is a high-tech joint-stock enterprise specializing in the research and development, production, and sales of communication equipment, with a registered capital of 10 million. It is a national high-tech enterprise. Our main products include fiber optic fusion splicers, electric fiber cleaver, OTDR (Optical Time Domain Reflectometer), and 9-in-1 optical fiber stripper. They are widely used in the construction, maintenance, emergency repair, security monitoring, and research and teaching of optical cable lines in telecommunications, mobile, China Unicom, radio and television operators, post and telecommunications, railway, engineering companies, and public institutions.





The factory is located in Chengdu High tech International Enterprise Port, with a modern production factory and standardized office buildings. We have passed the ISO9001 international quality management system certification, and our products have passed the EU CE, ROHS.International certifications such as FCC in the United States and UKCA in the United Kingdom have been passed by the National Institute of Quality Supervision and Inspection, China Academy of Information and Communications Technology.

















The qualified testing of Taier Laboratory has obtained nearly a hundred domestic and international patents at the same time. The "Signal Fire" series products have been sold to over 100 countries and regions including North America, South America, Europe, Africa, and Asia, and have received unanimous praise from customers.



Operator winning bid brand







Telecom installation and maintenance skills competition, Signal fire fusion splicer excellent performance, won the group first prize





Exhibition photos



Product testing certificate

Signal Fire Technology Co., Ltd. has passed the ISO9001 international quality management system certification. The product has passed international certifications such as the CE, RoHS, the United States FCC, and UKCA in the United Kingdom, and passed the qualified test through National Quality Supervision Institute, China Xintong Institute, and Tel Laboratory. At the same time, we obtained nearly 100 patents.









International Patent











International trademark

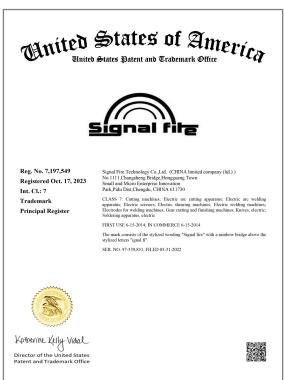



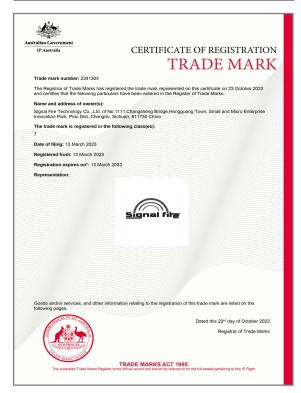



International trademark







