

N Female Connector for 7/8" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

## Product Description

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminum) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications. The N connector is one of the most common RF connector types and meets all requirements even under the most severe environmental conditions.



OMNI FIT™ Standard Connectors

## Features/Benefits

- **Cost effective two-piece design for safe and easy installation**
- **Compatible with copper and aluminium cable types i.e. one connector for both outer conductor materials eliminates the risk of faulty connector installation and helps to keep inventory down**
- **Robust mechanical design for low and consistent intermodulation performance i.e. keeps the mobile network performance up, reduces the number of dropped calls and avoids revenue losses**
- **Standard electrical performance for consistent and repeatable VSWR i.e. ensure network system performance**
- **Waterproof to IP 68 i.e. no downtime risk, secures revenue**
- **RoHS (EU) compliant i.e. can be used on a global basis**

## Technical Specifications

Transmission Line Type	Coaxial Cable
Cable Size	7/8"
Cable Type	Foam Dielectric
Model Series	UCF78-50A-Series / LCF78-50A-Series / UCF78-50L-Series / LCF78-50L-Series / RCF78-50A-Series
Connector Interface	N
Nominal Impedance, ohms	50
Connector Type	OMNI FIT™ Standard
Sealing Method	O-ring
Gender	Female
Plating Outer/Inner	Trimetal/Silver
Length, mm (in)	56.8 (2.23)
Outer Diameter, mm (in)	35.5 (1.40)
Weight, kg (lb)	0.15 (0.33)
Inner Contact Attachment	Spring Finger
Outer Contact Attachment	Spring O-Ring
3rd Order IM Product @ 2x20 Watts, dBc	<-155
Maximum Frequency, GHz	3.7
VSWR (Return Loss) for $0 < f \leq 1.0\text{GHz}$	1.03:1 (36.6 dB)
VSWR (Return Loss) for $1.0 < f \leq 2.7\text{GHz}$	1.04:1 (34.1 dB)
VSWR (Return Loss) for $2.7 < f \leq 3.7\text{GHz}$	1.08:1 (28.3 dB)
Wrench size front, mm (in)	32 (1-1/4)
Wrench size rear, mm (in)	32 (1-1/4)
Waterproof Level	IP68


## Notes

## Other Documentation

Installation instruction: [2800120-C.pdf](#)



N Female Connector for 7/8" Coaxial Cable, OMNI FIT™ standard, O-ring sealing

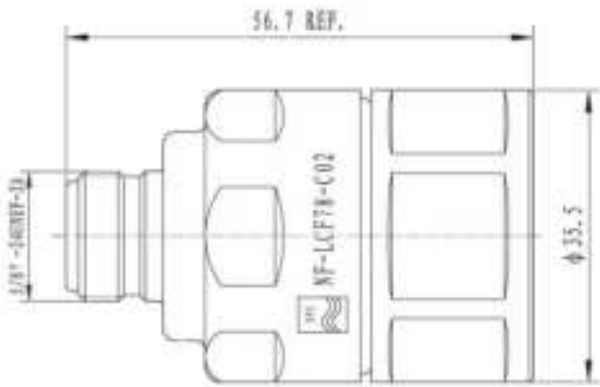

All information contained in the present datasheet is subject to confirmation at time of ordering